

HDS 8/20 DE

The new HDS 8/20 De hot water high-pressure cleaner impresses with its powerful diesel engine and robust Kärcher crankshaft pump, even where no power connection is available.



V
Stage V



Order no.

1.210-910.0

- Robust crankshaft pump with ceramic pistons
- Sturdy pipe frame for handling with crane
- Diesel engine with electric starter

Technical data

EAN code		4054278612546
Flow Rate	l/h	800
Operating pressure	bar / MPa	200 / 20
Temperature (supply 12°C)	°C	max. 80
Consumption fuel oil	kg/h	5.9
Fuel tank	l	30
Drive type		Diesel
number of simultaneous users		1
Mobility		cart
Weight (with accessories)	kg	243
Weight incl. packaging	kg	248
Dimensions (L × W × H)	mm	1130 × 910 × 895

Equipment

Trigger gun	EASY!Force Advanced
Cage frame	■
Electric starter	■
Power nozzle	■
Sturdy tubular steel frame for handling with crane	■

■ Included in delivery.

This device does not require instruction.



Economical, diesel-powered combustion engine

- Allows independence of external power sources.
- Complies with the requirements of exhaust emissions standard EU STAGE V.
- With convenient electro start.



Outstanding mobility


- Large, puncture-proof tyres and steering roller/caster with parking brake.
- Push handles for simple transport and manoeuvrability.
- Crane loading possible thanks to the sturdy tubular steel frame.



Robust design for the toughest jobs

- Sturdy tubular steel frame protects the machine against external effects.
- Proven safety technology such as thermo and safety valve and water filter.
- Suitable for crane loading in rental business and construction sector.

EQUIPMENT FOR HDS 8/20 DE 1.210-910.0

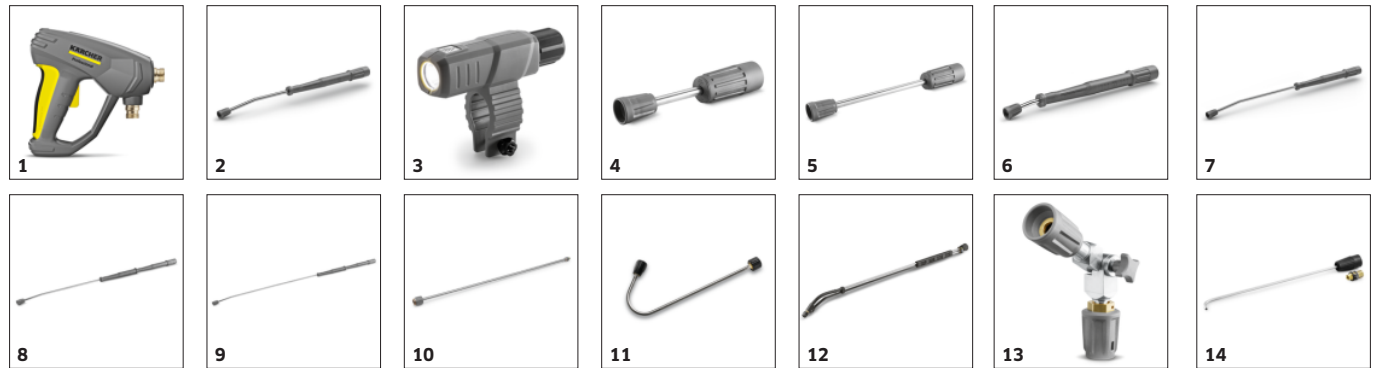

		Order no.	Description	
TRIGGER GUNS				
EASY!Force Advanced	1	4.118-005.0	Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	■
SPRAY LANCES				
Rotating spray lances				
Spray lance, 840 mm, rotatable	2	4.112-006.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	■
LED nozzle light	3	2.680-002.0	Bright, lightweight LED work light for direct mounting on spray lance of EASY!Force high-pressure gun. Better view in unfavourable lighting conditions for up to 5 working hours.	□
Spray lance, 250 mm, rotatable	4	4.112-027.0	Spray lance, 250 mm, rotatable, ergonomic	□
Spray lance, 400 mm, rotatable	5	4.112-024.0	Spray lance, 400 mm, rotatable, ergonomic	□
Spray lance, 600 mm, rotatable	6	4.112-007.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Spray lance, 1050 mm, rotatable	7	4.112-000.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Spray lance, 1550 mm, rotatable	8	4.112-018.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Spray lance, 2050 mm, rotatable	9	4.112-021.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Spray lance extender, 1000 mm	10	4.112-048.0	Spray lance extension with EASY!Lock connection. Length 1000 mm.	□
Angular spray lance				
WC and gutter lance	11	4.112-029.0	Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	□
Flexible spray lance				
Flexible lance, 1050 mm	12	4.112-035.0	1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	□
High pressure articulated joint	13	4.112-057.0	For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer.	□
Gutter cleaner				
Gutter cleaning lance	14	2.112-015.0	The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.	□

■ Included in delivery. □ Available accessories.


EQUIPMENT FOR HDS 8/20 DE 1.210-910.0



		Order no.	Description	
SPRAY LANCES				
Undercarriage spray lance				
Underbody lance	15	4.112-032.0	Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	☐
Additional handle				
Additional handle for EASY!Lock spray lances	16	4.321-380.0	Comfortable in every situation - the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task.	☐
KÄRCHER POWER NOZZLE				
Power nozzle spray angle 25°				
Power nozzle 25°, 040	17	2.113-021.0	Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	☒
Chemical nozzle , 250	18	2.113-020.0	Brass power nozzle for low-pressure operation and cleaning agent suction.	☐
HP nozzle spray angle 0°				
Power nozzle 0°, 040	19	2.113-001.0	High-pressure nozzle with powerful jet for extremely stubborn dirt.	☐
Power nozzle spray angle 15°				
Power nozzle 15°, 040	20	2.113-045.0	Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	☐
Power nozzle spray angle 40°				
Power Nozzle 40°, 040	21	2.113-003.0	Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	☐
HIGH-PRESSURE HOSES				
Standard with unions on both sides				
High-pressure hose, 10 m, DN 8, 315 bar, 2 × EASY!Lock	22	6.110-031.0	10 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☒
High-pressure hose, 15 m, DN 8, 315 bar, 2 × EASY!Lock	23	6.110-030.0	15 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☐
High-pressure hose, 20 m, DN 8, 315 bar, 2 × EASY!Lock	24	6.110-032.0	20 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☐
High-pressure hose, 30 m, DN 8, 315 bar, 2 × EASY!Lock	25	6.110-014.0	With rotary coupling, 2 × M 22 × 1.5	☐
High-pressure hose, 15 m, DN 10, 220 bar, 2 × EASY!Lock	26	6.110-042.0	15 m high-pressure hose M 22 × 1.5) with kink protection and threaded couplings at both ends. Further data: DN 10/155°C/220 bar.	☐
High-pressure hose, 20 m, DN 10, 220 bar, 2 × EASY!Lock	27	6.110-043.0	with union on both sides, M 22 × 1.5 with anti-kink protection. NW 10/155°C/220 bar	☐
High-pressure hose, 25 m, DN 10, 220 bar, 2 × EASY!Lock	28	6.110-044.0		☐

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR HDS 8/20 DE
1.210-910.0

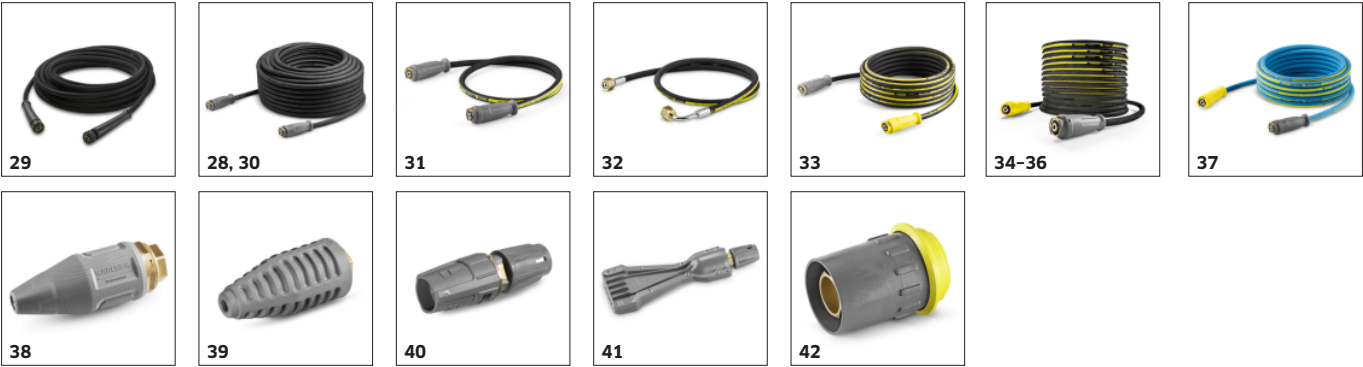

		Order no.	Description	
HIGH-PRESSURE HOSES				
Standard with unions on both sides				
High-pressure hose, 15 m, DN 12, 210 bar, 2 x EASY!Lock	29	6.110-059.0	High-pressure hose for water volumes greater than 1,800 l / h. With union on both sides. 2x M 22 x 1.5 with anti-kink protection.	☐
High-pressure hose, 40 m, DN 12, 210 bar, 2 x EASY!Lock	30	6.110-060.0		☐
Longlife 400 with unions on both sides				
High-pressure hose Longlife, 1,5 m, DN 8, 400 bar, 2 x EASY!Lock	31	6.110-024.0	1.5 m high-pressure hose (DN 8, M 22 x 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 x 1.5).	☐
High-pressure hose Longlife, 1,5 m, DN 8, 400 bar, 1 x EASY!Lock / 1 x M22 x 1.5	32	6.110-069.0	High-pressure hose (ID 8) with double steel reinforcement, 1.5 m long, suitable for up to 400 bar pressure. Connectors: M 22 x 1.5, quick and convenient EASY!Lock hand screw connection.	☐
High-pressure hose Longlife, 10 m, DN 8, 400 bar, 2 x EASY!Lock	33	6.110-038.0	Durable, 10 m long high-pressure hose (ID 8) with double steel reinforcement and EASY!Lock hand screw connection at both ends and ANTI!Twist. Approved for 400 bar pressure.	☐
High-pressure hose Longlife, 30 m, DN 8, 400 bar, 2 x EASY!Lock	34	6.110-023.0	With rotary coupling, 2 x M 22 x 1.5	☐
High-pressure hose Longlife, 20 m, DN 8, 400 bar, 2 x EASY!Lock	35	6.110-027.0	with rotary coupling, 2 x M 22 x 1.5	☐
High-pressure hose Longlife, 15 m, DN 8, 400 bar, 2 x EASY!Lock	36	6.110-029.0	With rotary coupling, 2 x M 22 x 1.5	☐
Longlife food industry version with unions on both sides				
High-pressure hose food grade Longlife, 10 m, DN 8, 400 bar, 2 x EASY!Lock	37	6.110-053.0	With blue, non-marking and animal fat resistant outer covering: durable high-pressure hose (ID 8), 10 m long, ANTI!Twist and EASY!Lock hand screw connection at both ends.	☐
ROTARY NOZZLES (DIRT BLASTERS)				
Dirt blaster, large				
Dirt blaster Vibrasoft, 050	38	4.114-066.0	Vibrasoft rotary nozzle with rotating point jet for ten times greater cleaning performance. Durable dirt blaster thanks to ceramic nozzle. Reduces vibrations by up to 30% for maximum ergonomics.	☐
Dirt blaster, large, 040	39	4.114-041.0	The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	☐
MULTIPLE-JET NOZZLES				
Triple nozzles				
Triple nozzle, 040	40	4.117-033.0	Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For machines with an injector, the low-pressure flat stream is useful for cleaning agent suction and application.	☐
ECO!BOOSTER				
HydroBooster JET TR 045 Professional	41	2.113-087.0		☐
QUICK CONNECT				
Quick-fitting pipe union coupler trapezo	42	2.115-000.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 x 1.5 internal thread.	☐

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR HDS 8/20 DE 1.210-910.0



		Order no.	Description	
QUICK CONNECT				
Quick-fitting pipe union plug nipple tra	43	2.115-001.0	Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 × 1.5 external thread.	☐
DRUM AND TANK CLEANING				
Add-on kit mud sucker	44	2.641-798.0		☐
OTHER HP ACCESSORIES				
Jet gun	45	2.869-067.0	Short set-up time, easy transport, instant switch off - the jet gun is the affordable cleaning method for all kinds of small to medium-sized areas. Adjustable pressure/water volume.	☐
PIPE CLEANING				
Pipe cleaning hose, ID 6				
Hose assembly TR pipe cleaning DN6 14MPa	46	6.110-108.0		☐
	47	6.110-109.0		☐
	48	6.110-110.0		☐
Hose assembly TR pipe cleaning DN6 max.2	49	6.110-046.0	The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
	50	6.110-047.0	The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Hose assembly TR pipe cleaning DN6 14MPa	51	6.110-048.0	10 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	☐
Pipe cleaning hose	52	6.110-049.0	20 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	☐
Pipe cleaning hose, DN 6, 30 m	53	6.110-050.0	30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	☐
Pipe cleaning nozzle				
Dirt blaster pipe cleaning D21/060	54	4.765-002.0	The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	☐
Dirt blaster pipe cleaning D30/060	55	4.765-005.0		☐
Pipe cleaning nozzle	56	5.763-015.0	16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	☐

☐ Available accessories.

EQUIPMENT FOR HDS 8/20 DE 1.210-910.0



		Order no.	Description	
PIPE CLEANING				
Pipe cleaning nozzle				
Pipe cleaning nozzle	57	5.763-016.0	16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	☐
FLOOR AND HARD SURFACE CLEANER				
Hard surface cleaner FR 30 ME				
FR 30 ME surface cleaner	58	2.111-013.0	Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	☐
Hard Surface Cleaner FR 50				
FR 50 surface cleaner	59	2.111-023.0	Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas. With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	☐
Machine-specific nozzle kit for FR				
Nozzle kit for FR, 650 l/h - 850 l/h	60	2.639-187.0	Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (650 to 850 l/h).	☐
Machine-specific nozzle kits for FRV				
Nozzle kit for FRV, 040	61	2.642-431.0	Machine-specific nozzle kit Kärcher power nozzles and jet nozzle for FRV 30.	☐
Hard surface cleaner FRV 30 Me				
FRV 30 Me Surface Cleaner	62	2.111-012.0	Thanks to automatic suction of the dirty water, the stainless steel FRV 30 Me Surface Cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85°C.	☐
Extension hose FRV 30 Me and FRV 50 Me	63	4.441-040.0	5 m extension hose for FRV 30 Me. Includes connecting adapter.	☐
FOAM SYSTEMS				
Cup foam lance				
Cup foam lance Advanced 2, 700 l/h - 800 l/h	64	4.112-064.0	For high-pressure cleaners with a flow rate of 700-800 l/h: new, robust and very high-quality foam cup lance with outstanding foam quality while consuming half as much cleaning agent.	☐
Cup foam lance DUO Advanced 2, 700 l/h - 800 l/h	65	4.112-068.0		☐
Cup foam lance Basic 2, 700 l/h - 800 l/h	66	4.112-054.0		☐
1-litre cleaning agent container for cup foam lance advanced	67	6.414-050.0	Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0).	☐
Inno Foam Set				
Inno foam kit with detergent injector	68	2.112-000.0	High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	☐
Easy Foam Set				
Easy Foam Set with RM injector	69	2.112-010.0	HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	☐
Nozzle kits for Inno/Easy Foam Set				
Nozzle kit 090 Inno/Easy kit 700 - 1000 l/h	70	2.111-019.0	Nozzle kit contains Kärcher power nozzles and nozzle inserts. For Inno/Easy-Foam set 700-1000 l/h. For optimal foam system performance.	☐

☐ Available accessories.

EQUIPMENT FOR HDS 8/20 DE 1.210-910.0



		Order no.	Description	
FOAM SYSTEMS				
Foam nozzle mounting kit				
Foam nozzle kit	71	2.112-013.0	Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	☐
MIXERS AND INJECTORS				
HP detergent injector				
Detergent injector for high and low pressure (without nozzles)	72	4.637-032.0	Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	☐
Detergent injector for high pressure	73	4.637-033.0	Cleaning agent dosage at high pressure 3 - 5 %	☐
Machine-specific nozzle kit with order no. 3.637-170				
Nozzle insert trapezoidal thread HDS-GER	74	4.769-011.0	For HD/HDS 750 - 1000 l/h. Consists of nozzle insert + HP power nozzle + union	☐
Nozzle insert with order no. 3.637-001				
Nozzle insert for Order No. 3.637-001, high-pressure for machines up to 1100 l/h.	75	4.769-003.0	Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.	☐
Low pressure for units rated up to 1100 l/h	76	4.769-001.0	For low pressure with machines up to 1,100 l/h	☐
COUPLING PARTS				
Rotary coupling				
Rotary coupling	77	4.111-021.0	Kärcher rotary coupling prevents twisting and kinking of high-pressure hoses for ease of use. Connector Easy!Lock. With grip protection.	☐
Connector				
Nozzle connector/screw connector	78	4.111-022.0	Nozzle connector/screw connector for connecting high-pressure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: 1x M 22 x 1.5 and 1x M 18 x 1.5.	☐
Y distributor	79	4.111-024.0	Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	☐
Adapter EASY!Lock				
Adapter 1 M22AG-TR22AG	80	4.111-029.0	Adapter 1 to connect the old hose with the new hose	☐
Adapter 2 M22IG-TR22AG	81	4.111-030.0	Adapter 2 to connect the old device with the new hose and the old gun with the new hose	☐
Adapter 3 M22IG-TR22AG	82	4.111-031.0	Adapter 3 to connect the old gun with the new spray lance and new servo regulator	☐
Adapter M22 - Swivel	83	4.111-032.0	M22 x 1,5female and swivel connection. For extension of high-pressure hoses with AVS connection or for usage of the telescopic lance with a high-pressure hose with AVS connection.	☐
Adapter 5 TR22IG-M22AG	84	4.111-033.0	Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	☐

☐ Available accessories.


EQUIPMENT FOR HDS 8/20 DE 1.210-910.0



		Order no.	Description	
COUPLING PARTS				
Adapter EASY!Lock				
Adapter 6 TR22IG-M22AG	85	4.111-034.0	Adapter 6 to connect the new device with the old hose and the old hose with the new gun	☐
Adapter 7 M18IG-TR20AG	86	4.111-035.0	Adapter 7 to connect the old spray lance with the new nozzle	☐
Adapter 8 TR20IG-M18AG	87	4.111-036.0	Adapter 8 to connect the new spray lance with the old nozzle	☐
FACADE AND SOLAR PANEL CLEANING				
Brushes				
Drive for roller brush 500	88	4.762-584.0	Hydraulic drive for rotating roller brushes. For cleaning façades or solar power installations with our professional high-pressure cleaners. Installation on spray lance or telescopic lance.	☐
Splash guard for roller brush 500	89	4.762-621.0	Splash guard with velcro fastening for rotating roller brush. Clear view of the brush thanks to transparent film, with protection against splashes at the same time.	☐
Roller brush 500 soft	90	4.762-623.0	Soft brush attachment for use with hydraulic drive (4.762-584.0). Ideal for glass and solar power installation cleaning. Easy quick-change system and secure mounting on drive.	☐
Roller brush 500 medium	91	4.762-624.0	Medium-hard brush attachment for use with hydraulic drive (4.762-584.0). Suitable for sensitive façades, foils and fabrics. Easy and safe quick-change system.	☐
Roller brush 500 hard	92	4.762-625.0	Hard brush attachment for use with hydraulic drive (4.762-584.0). For rough façades, stone and wooden patios. Safe and easy quick-change system.	☐
Brush hard	93	6.960-133.0	Brush with hard bristles for cleaning industry facades and floor coverings and removing coarse dirt. Simple installation on telescopic lances or high-pressure lances from Kärcher.	☐
Brush medium	94	6.960-134.0	Optimally cleans facades, roller shutters and textile fabrics: the brush with medium-hard bristles for fast and simple attachment to telescopic lances or high-pressure lances from Kärcher.	☐
Brush soft	95	6.960-135.0	For simple installation on telescopic lances or high-pressure lances from Kärcher: brush with soft bristles for deep cleaning of sensitive surfaces such as glass or solar systems.	☐
iSolar 800 Advanced	96	6.368-094.0	iSolar 800 water-driven brush head, 800 mm wide, for water flow rates of 700-1,000 l/h. With two contra-rotating disc brushes and flexible angle joint. For photovoltaic systems.	☐
iSolar 400 Advanced	97	6.368-092.0	iSolar 400 brush for water flow rate of 700-1,000 l/h. The water-driven disc brush with a width of 400 mm cleans small to medium-sized photovoltaic systems. Also perfect for use on elevated systems.	☐
Telescopic				
TL low pressure adapter	98	4.580-097.0	TL low-pressure adapter comprising ball valve for tool-free installation on telescopic lances. Ideal for applications with rotating high-pressure brushes.	☐

☐ Available accessories.

EQUIPMENT FOR HDS 8/20 DE 1.210-910.0

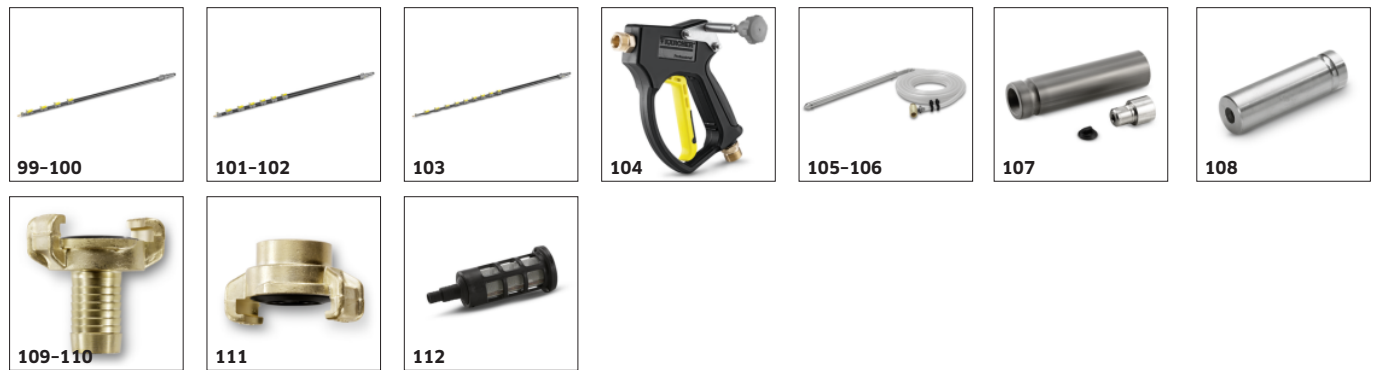

		Order no.	Description	
FACADE AND SOLAR PANEL CLEANING				
Telescopic				
Telescopic lance TL 7 F	99	4.762-609.0	Telescopic lance TL 7 F with up to 7 m reach made from robust and lightweight glass fibre. With practical quick-release fasteners for simple retraction and extension.	☐
Telescopic lance TL 7 H	100	4.762-610.0	Multifunctional hybrid telescopic lance TL 7 H made of rigid and lightweight carbon-glass fibre mix. Telescopic thanks to quick-release fastenings. Up to 7 m reach.	☐
Telescopic lance TL 10 H	101	4.762-611.0	Up to 10 m reach: hybrid telescopic lance TL 10 H. Comprising carbon-glass fibre mix and suitable for multifunctional use. Simple retraction and extension thanks to quick-release fasteners.	☐
Telescopic lance TL 10 C	102	4.762-612.0	Carbon fibre telescopic lance TL 10 C. With up to 10 m reach and practical quick-release fasteners. Multifunctional use for cleaning facades, windows or solar panels.	☐
Telescopic lance TL 14 C	103	4.762-613.0	Maximum rigidity with minimum weight: telescopic lance TL 14 C made from carbon fibre. Enormous reach of 14 m, multifunctional use and easy to use thanks to quick-release fasteners.	☐
TL high pressure adapter	104	4.775-154.0	TL high-pressure adapter, flexible high-pressure gun for high-pressure cleaning with telescopic lances. Ergonomic, easy to install, suitable for right- and left-handed individuals.	☐
WET BLASTING ATTACHMENT				
Wet blasting attachment (without nozzle)				
Wet blasting attachment with flow control (without nozzles)	105	4.115-000.0	Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	☐
Wet blasting attachment without flow control (nozzles not included)	106	4.115-006.0	Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.	☐
Nozzle pack for wet blasting attachment				
Nozzle pack TR wet jet set 0040	107	2.112-019.0	Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.115-000.0 4.115-006.0.	☐
Boron carbide nozzle				
Boron carbide nozzle, for machines as of 1000 l/h	108	6.415-084.0	In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	☐
WATER CONNECTION				
Geka coupling				
With hose nozzle, R 1/2"	109	6.388-461.0	with hose liner	☐
With hose nozzle, R 3/4"	110	6.388-455.0		☐
Hose coupling	111	6.388-458.0	with female thread	☐
Suction filter				
Water filter	112	6.414-956.0	Suitable for ponds, storage tanks or similar, polyamide filter casing, stainless steel strainer, 800 µm mesh, R 3/4" and R 1" connection, without non-return valve	☐

☐ Available accessories.

EQUIPMENT FOR HDS 8/20 DE 1.210-910.0



		Order no.	Description	
WATER CONNECTION				
Suction filter				
Suction filter with check valve	113	4.730-012.0	Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	☐
Fine-mesh water filter				
Add-on kit water filter universal	114	2.637-020.0		☐
Fine-mesh water filter, 100 µm, R 3/4"	115	2.637-691.0	Fine-mesh water filter, 100 µm, max. temperature 60°C. Protects the high-pressure cleaner from dirt particles contained in the water. Transparent filter cup. Water flow rate up to 1200 l/h. Connector 3/4".	☐
Fine-mesh water filter with adapter	116	4.730-102.0	Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1".	☐
Water supply hose				
Water supply hose	117	4.440-207.0	NW 19 R1" / R 3/4", up to 85 °C, for pick-up	☐
WASHING BRUSHES				
Push-on washing brush				
Push-on wash brush, M 18 × 1.5	118	4.113-001.0	Push-on wash brush for universal use. Simply push on to lance. Connector: M 18 × 1.6.	☐
Rotating washing brush				
Rotating wash brush for < 800 l/h machines, nylon bristles	119	4.113-004.0	The rotating wash brush gently removes fine dust and traffic film from all surfaces. Temperature resistant up to 60°C. (M 18 × 1.5, replaceable brush insert).	☐
Rotating wash brush for < 800 l/h machines, natural bristles	120	4.113-003.0	Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60°C, M 18 × 1.5 (replaceable brush insert).	☐

☐ Available accessories.