

JUPITER

HIGH EFFICIENCY DUAL VOLTAGE FLOODLIGHTS

Jupiter is a new generation of area floodlights that offers exceptional energy savings and outstanding performance, with an efficacy of 140lm/W as standard. This delivers savings of up to 40% compared with many other LED floodlights. The ultra-sleek die cast body is fitted with a multi-voltage driver, allowing the Jupiter to be used for Site Lighting as well as 230V supply applications.



Features

- Energy saving high efficiency - 140lm/W
- 240H Salt Spray Tested
- Robust die-cast aluminium body
- Multi-voltage driver, suitable for 110V & 230V supply
- Pre-wired with 1m cable for fast, convenient installation



Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
JUPS100-40	Jupiter 100W 14000 lm Symmetrical Floodlight 4000K	14000lm		100W	140 lm/W

Product Information

Warranty	7 Years
On-Site Warranty	2 Years
Colour Appearance (CCT)	4000K
IP Rating	IP65
IK Rating	IK07
Voltage	110-277V
Material (Body/Housing)	Die-Cast Aluminium

Colour Finish	Black RAL9017
LED Life Expectancy	L70B50 50,000 Hours
Power Factor	0.95
Frequency	50/60Hz
Driver Type	Fixed Output
Approval	UKCA CE
Electrical Class	Class I

Material (Diffuser/Cover)	Tempered Glass
Colour Rendition (CRI)	Ra >70

Working Temperature	-30°C to 45°C
---------------------	---------------

OUTDOOR LIGHTING

SPECIFICATION SHEET






JUPITER

HIGH EFFICIENCY DUAL VOLTAGE FLOODLIGHTS

Packaging Information

Dimensions (mm)	L: 325 x W: 236 x D: 48 mm
Product Net Weight (kg)	1.8 kg
Barcode	5055807624947
Box Dimensions (mm)	L: 265 x W: 368 x D: 87 mm
Box Gross Weight (kg)	1.53 kg

Units/Outer Carton	6
Outer Carton Barcode	15055807624944
Outer Carton Dimensions (mm)	L: 555 x W: 282 x D: 390 mm
Outer Carton Gross Weight (kg)	12.55 kg

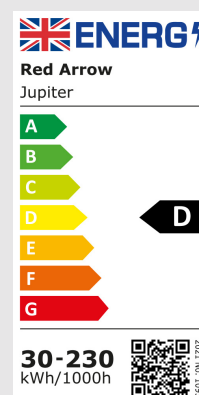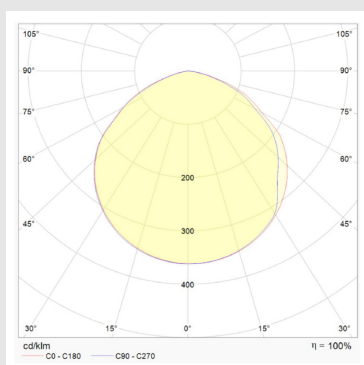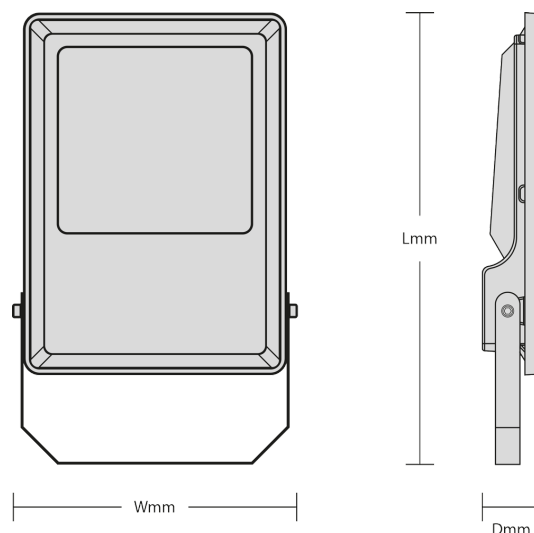

Tel: 0114 279 8999 | Email: sales@redarrowelectrical.co.uk | redarrowelectrical.co.uk

Red Arrow Electrical Ltd, Cortonwood Drive, Brampton, Barnsley, S73 0UF

This document is uncontrolled if printed, all information is subject to change. Generated on 20/02/26