

12V | 2000A

GB70



# START DEAD BATTERIES. ULTRASAFE® LITHIUM JUMP STARTER.™

## GAS & DIESEL

### UP TO 8.0L GAS & 6.0L DIESEL.

Designed for gas engines up to 8 liters and diesel engines up to 6 liters for cars, SUVs, trucks, boats, RVs, and more.

## USB

### CHARGE & RECHARGE.

It's internal battery can be used to recharge any personal mobile devices like smartphones, tablets, or any other USB device, and can be recharged by any powered USB port.

## 40X

### UP TO 40 JUMPSTARTS.

Compact, yet powerful lithium jump starter rated at 2,000 amps. Full power to jump start a vehicle up to 40 times on a single charge.

## ULTRA SAFE

### SPARK PROOF TECHNOLOGY.

Safely connect to any 12-volt car battery with our mistake-proof design featuring spark-proof technology and reverse polarity protection.



NOCO

30339 Diamond Parkway, #102  
Glenwillow, OH 44139 | USA  
1.800.456.6626

no.co

LEAD ACID

WET

GEL

MF

EFB

AGM

AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN



## INTERFACE

### POWER LED

The jump starter is in standby or the battery voltage is too low for the jump starter to detect.



### POWER BUTTON

Push to turn unit "On" & "Off".



### CHARGE LED

Indicates the charge level of the internal battery.



### BOOST LED

Illuminates white when boost is active. The LED flashes white when manual override feature is active.



### LIGHT MODE BUTTON

Toggles the ultra-bright LED light through 7 light modes: 100% > 50% > 10% > SOS > Blink > Strobe > Off



### ERROR

Illuminates Red if reverse polarity is detected. Blinks "on" and "off" in various sequences to convey error conditions.




### MANUAL OVERRIDE.

Press and hold the manual override button for 3 seconds, until the Boost LED starts flashing, to enter into manual mode.



## WHAT'S IN THE BOX

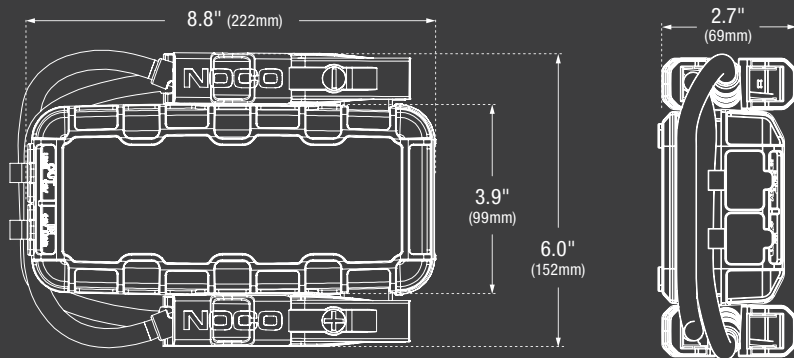

\*Accessories not to scale with GB70



XGC Extension Cable



USB-MicroUSB



User Guide



XGC 12V Male Adapter



XGC 12V Female Adapter



Microfiber Storage Bag

## CHARGE DEVICES.

Recharge your personal devices on the go, like smartphones, tablets, e-watches and more - up to 6 smartphone recharges.

## RECHARGE TIME

|      |      |
|------|------|
| 0.5A | 12hr |
| 1A   | 6hr  |
| 2A   | 3hr  |

## TECHNICAL SPECIFICATIONS

|                                      |                                                                                                                     |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| INTERNAL BATTERY:                    | 56 Watt-Hour Lithium Ion                                                                                            |
| PEAK CURRENT RATING:                 | 2000A                                                                                                               |
| OPERATING TEMPERATURE:               | -4°F to +122°F (-20°C to +50°C)                                                                                     |
| CHARGING TEMPERATURE:                | 32°F to +104°F (0°C to +40°C)                                                                                       |
| MICRO USB (INPUT):                   | 5V, 2.1A                                                                                                            |
| USB (OUTPUT):                        | 5V, 2.1A                                                                                                            |
| XGC (INPUT):                         | 12 VDC, 3A Fast Charge                                                                                              |
| XGC (OUTPUT):                        | 12 VDC, 15A Power Supply                                                                                            |
| HOUSING PROTECTION:                  | IP65 (w/Ports Closed)                                                                                               |
| COOLING:                             | Natural Convection                                                                                                  |
| UNIT WEIGHT:                         | 4 lbs (1.81kg)                                                                                                      |
| UNIT WEIGHT W/ CLAMPS & ACCESSORIES: | 5 lbs (2.26kg)                                                                                                      |
| LED FLASHLIGHT:                      | 400 Lumens                                                                                                          |
| VOLUMETRICS:                         | <b>Retail Packaging:</b><br>Dimensions: 7.28"x4.84"x9.80"<br>Weight: 5.09lbs<br>UPC: 0-46221-15005-6                |
|                                      | <b>Master Carton:</b><br>Dimensions: 15.98"x10.83"x11.50"<br>Weight: 22.60lbs<br>Quantity: 4<br>UCC: 10046221150053 |
|                                      | <b>Inner Carton:</b><br>Dimensions: 10.27"x7.72"x5.39"<br>Weight: 5.44lbs                                           |
|                                      | <b>Units Per Pallet:</b><br>NA - 180 Units<br>EU - 120 Units                                                        |

**NOCO**

30339 Diamond Parkway, #102  
Glenwillow, OH 44139 | USA  
1.800.456.6626

no.co

