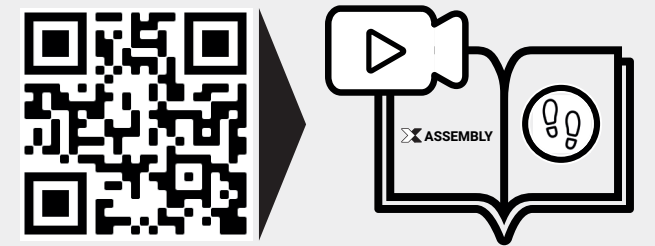
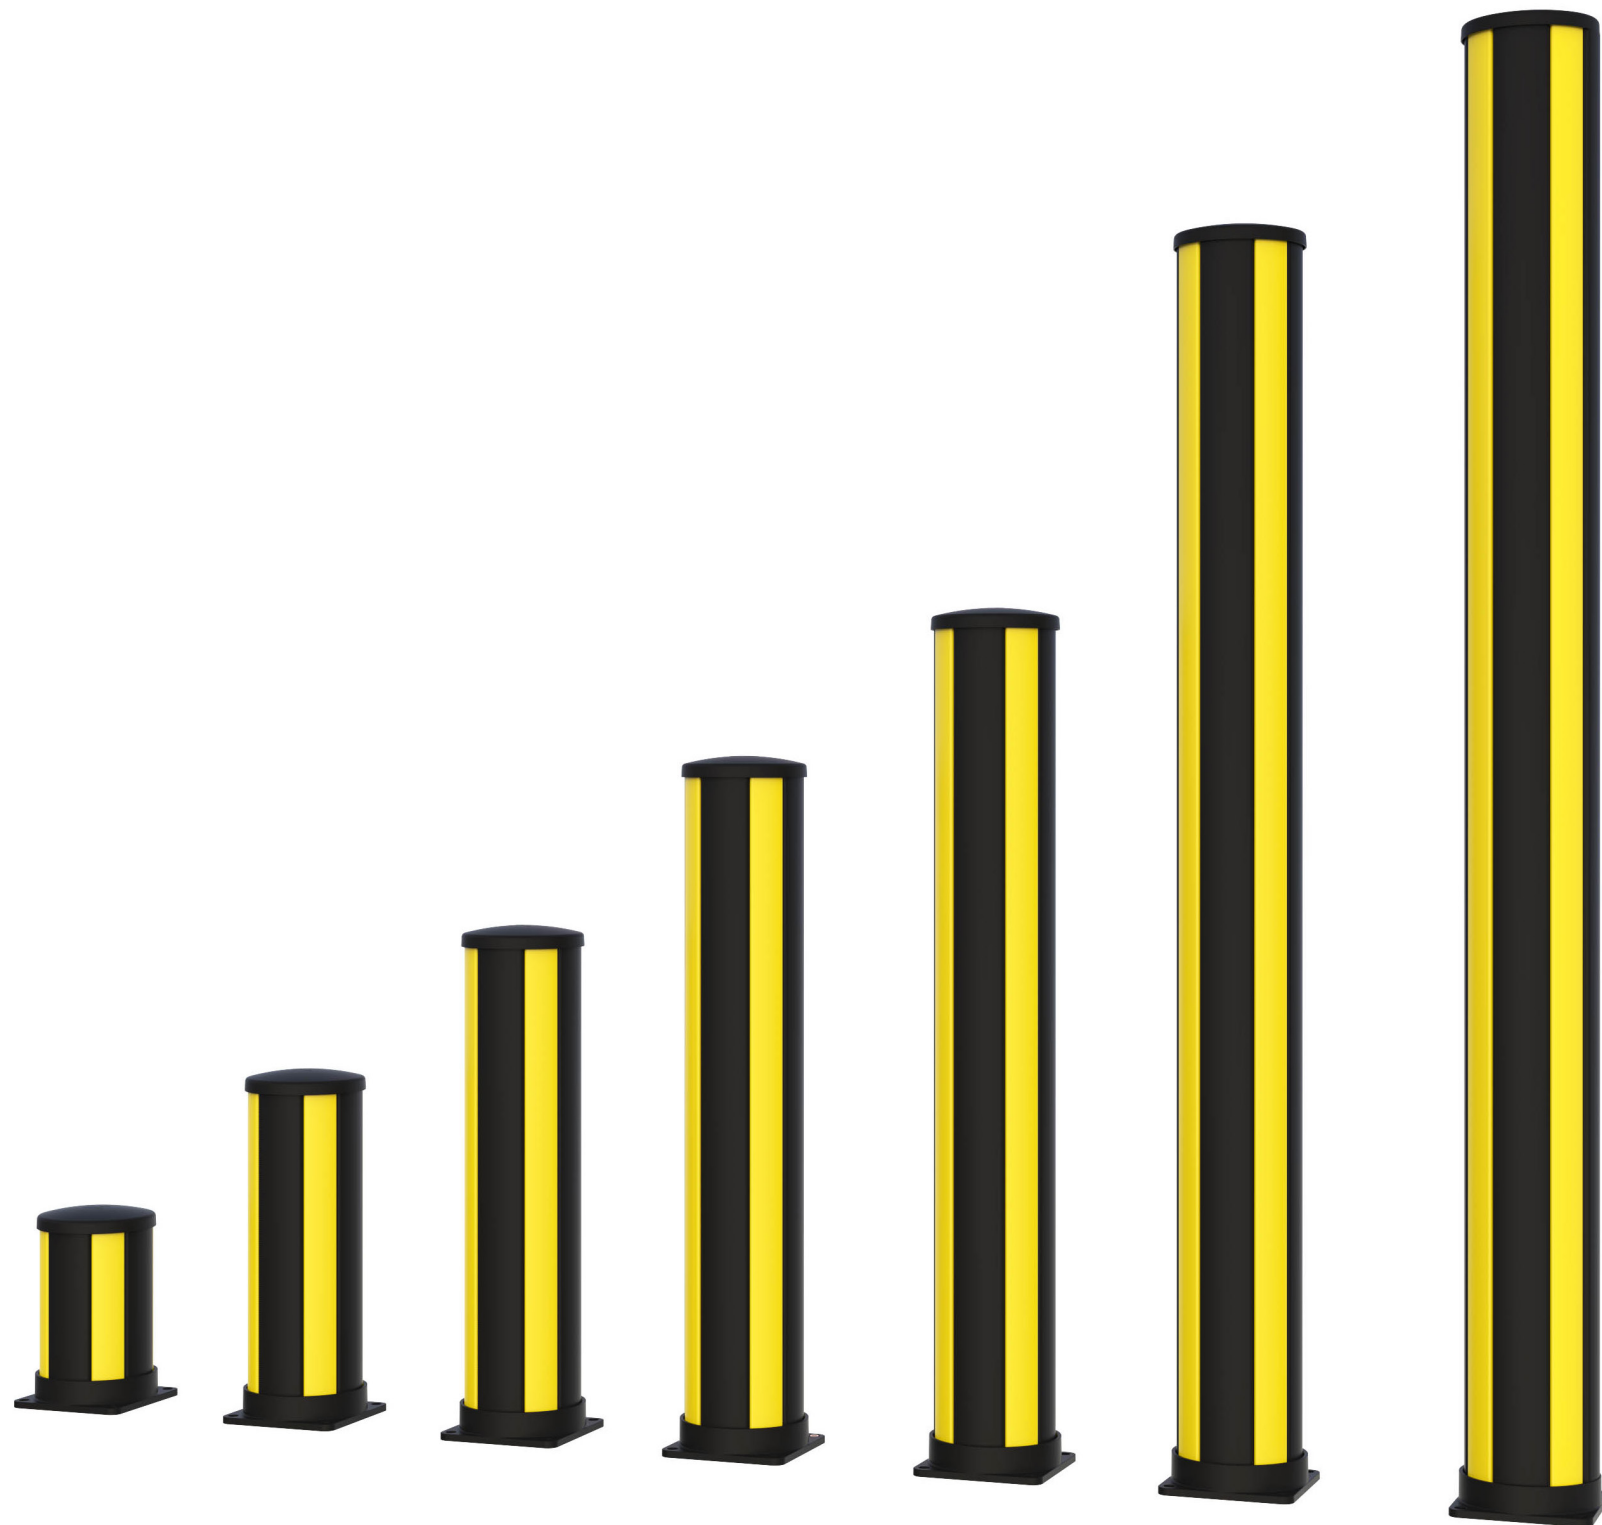








X-Protect







Classic bollards & X-Guard compatible bollards




AXELENT AB
WWW.AXELENT.COM



										
X1	X4	X1	X1	X1	X1	X4	X4	X1		
BCP0-035-0000	PT102-305	PT103-304	PT143-337	PT144	Foot classic	Cap	Top washer	Shims	Screw anchor Hilti HUS4-HF 10x100	Flange nut M20
BCP0-061-0000	PT102-565	PT103-564	PT143-597							
BCP0-087-0000	PT102-825	PT103-824	PT143-857							
BCP0-116-0000	PT102-1115	PT103-1114	PT143-1147							

 X1					 X4					 X1					 X1					 X1					 X1					 X1					 X4					 X4					 X1														
*Must be used in combination with X-Guard																																																											
BCP0-140-0000*					PT102-1355					PT103-1354					PT143-597					PT123-230 + 10-9691					PT144					Foot classic					Cap					Top washer					Shims					Screw anchor <i>Hilti HUS4-HF</i> 10x100					Flange nut <i>M20</i>				
BCP0-200-0000*					PT102-1955					PT103-1954					PT143-857					PT123-830 + 10-9691																																							
BCP0-230-0000*					PT102-2255					PT103-2254					PT143-1147					PT123-1130 + 10-9691																																							

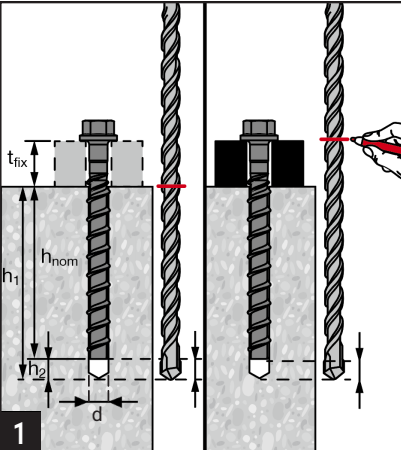
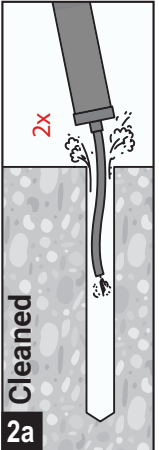
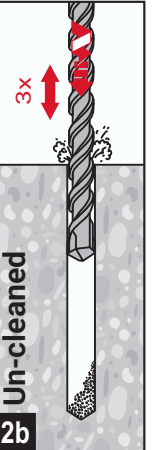


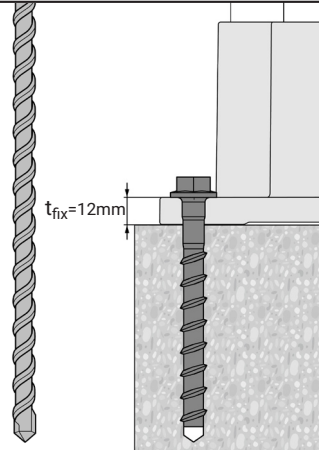
Hilti HUS4-HF









Drill hole diameter, hammer drill bit	d [mm]	10
Minimum depth of drill hole following 2a, $t_{fix}=12$ mm	h_1 [mm]	98
Minimum depth of drill hole following 2b, $t_{fix}=12$ mm	h_1 [mm]	118
Maximum depth of drill hole	Actual concrete thickness – 30 mm	
Minimum concrete thickness (min C25/30)	h_{min} [mm]	140
Anchor Length	L	100
Hilti Setting Tool (1) as of ETA April 2024	SIW 6AT-A22 ½" SIW 22T-A ½" SIW 6-22-A ½" SIW 8-22 ½" gear 1 SIW 9-A22 ¾"	

1) Installation with other impact driver of equivalent power is possible

